
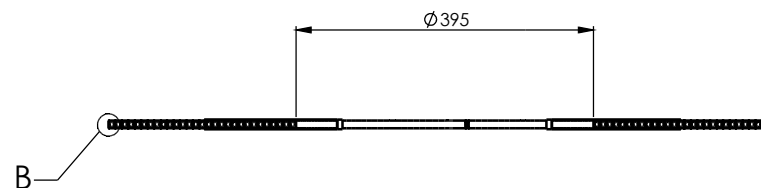
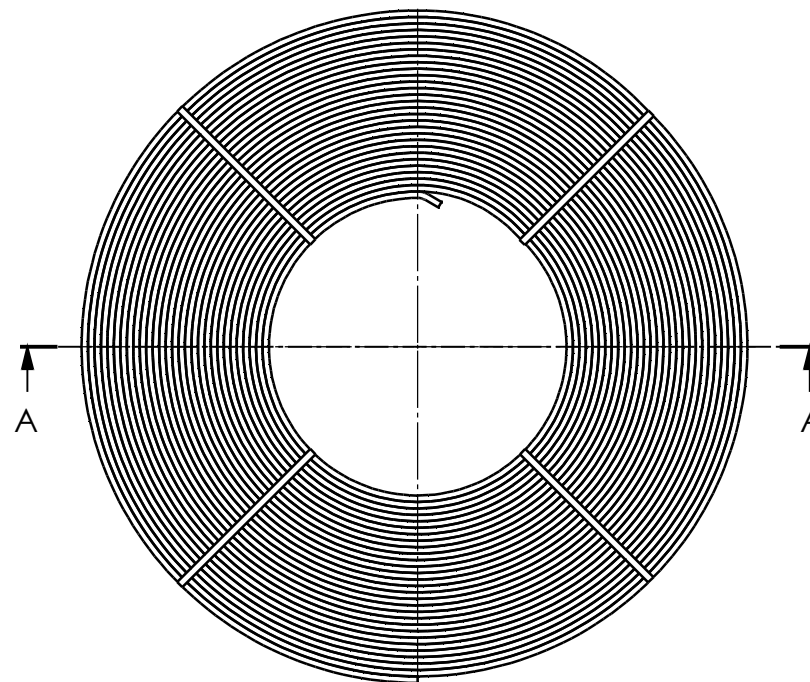



1. TUBE TO BE SUPPLIED IN ACCORDANCE WITH CROSS SECTION SHOWN (DETAIL 'B').
2. TO BE SUPPLIED IN LENGTHS OF 34 METRES WOUND ON EDGE AS SHOWN AND SECURED WITH TAPE.
3. INDIVIDUAL COILS TO BE SEPARATED WITH BROWN PAPER.
4. FINISH - CLEAN.
5. PRESSURE TIGHT TO 300 PSI.



SECTION A-A

					MATERIAL: ALUMINIUM GRADE 1370 EC 99.7% (MIN) PURE. TEMPER AS EXTRUDED (SOFT)	PROTECTIVE FINISH: NONE	ALL DIMENSIONS IN mm FOR EXPLANATION OF DIMENSIONS, NOTES, SYMBOLS etc. SEE BS 8888  3rd ANGLE PROJECTION	WEIGHT (kg)	SCALE (ORIG)	TITLE			
								7.83	1:5	ARMATURE TUBE, V964, 18,000lbf			
								GENERAL TOLERANCES (UNLESS OTHERWISE STATED)					
								BS EN 22768 CLASS m					
													
1	INITIAL ISSUE	CEEMA/AB	-	10/01/2014				DRAWING No.		REV	SHEET	SIZE	
REV	DESCRIPTION	DRN	APPD	DATE				V300766		1	1 / 1	A2	